


Diamant-Werkzeug · diamond tools

Altbetonsägeblätter Cured concrete saw blades

FC71 · FC75 · FC72 · FC76

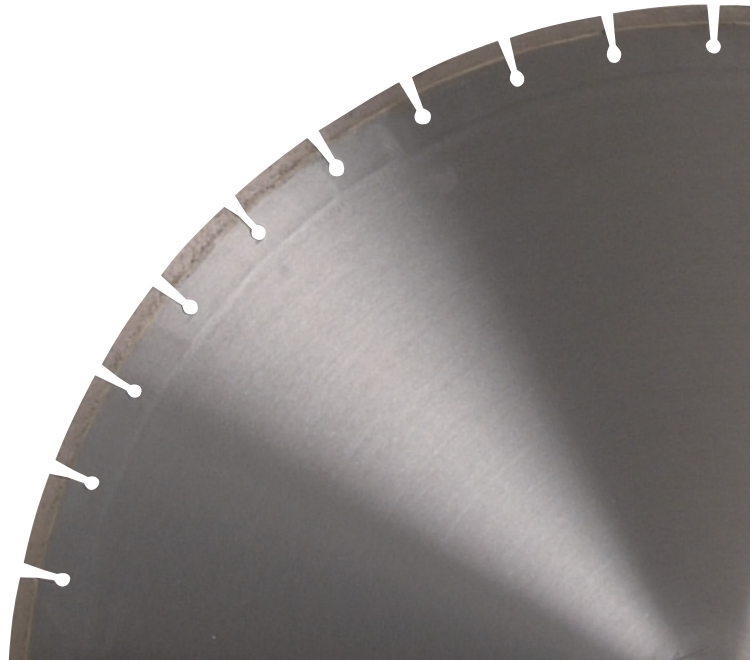

BESTELLNUMMER ORDER NUMBER	AUSSEN Ø MM OUTSIDE Ø MM	SEG. BREITE MM SEGM. WIDTH MM	FC71 · FC75		FC72 · FC76	
			ZAHNUNG TOOTHING	SEG. ANZAHL NO. OF SEGM.	ZAHNUNG TOOTHING	SEG. ANZAHL NO. OF SEGM.
3FC_C_0450-36	450	3,6	C1	26	C3	32
3FC_C_0500-36	500	3,6	C1	30	C3	36
3FC_C_0600-36	600	3,6	C1	36	C3	42
3FC_C_0600-45	600	4,5	C1	36	C3	42
3FC_C_0600-50	600	5,0	C1	36	C3	42
3FC_C_0700-45	700	4,5	C1	40	C3	50
3FC_C_0800-45	800	4,5	C1	46	C3	57
3FC_C_0800-50	800	5,0	C1	46	C3	57
3FC_C_0900-45	900	4,5	C1	50	C3	65
3FC_C_1000-45	1000	4,5	C1	56	C3	72
3FC_C_1000-50	1000	5,0	C1	56	C3	72
3FC_C_1200-45	1200	4,5	C1	68	C3	88
3FC_C_1200-50	1200	5,0	C1	68	C3	88
3FC_C_1500-45	1500	4,5	C1	78		

Achtung: Standardbohrung 25,4 mm mit Nebenloch. Bei Ihrer Bestellung bitte unbedingt die gewünschte Bohrung mit Bündig-Schneidlöchern oder die Maschinentype und die gewünschte Type in die Bestellnummer einfügen.

Please note: Standard holes 25.4 mm with pin hole. On your order, please indicate the needed hole with flush cut bores or the machine type and the needed type into the order number.

Wiederbelag · retipping

FC71 · FC75 · FC72 · FC76

BESTELLNUMMER ORDER NUMBER	SEGMENTBREITE MM SEGMENT WIDTH MM
3WB-FC_-36-10	3,6
3WB-FC_-40-10	4,0
3WB-FC_-45-10	4,5
3WB-FC_-50-10	5,0

Achtung: Bei ihrer Bestellung die gewünschte Segmenttype und -breite bekanntgeben.

Please note: Indicate the required segment type and width on your order.

